



XL355—XL940

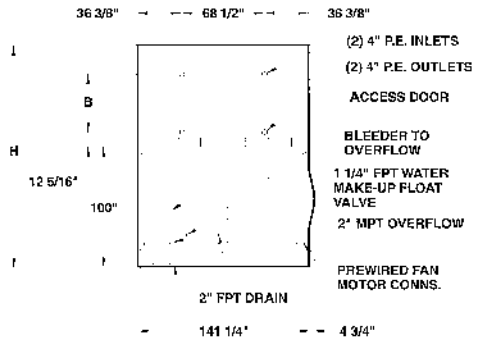

XL535—XL940

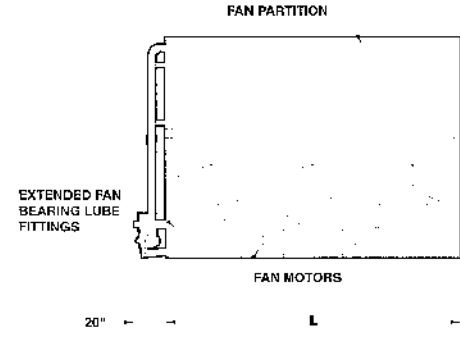

XLP Model ¹	NH ₃ Tons ²	CFM	Fan Mtr HP	Spray Water GPM	Pump Mtr HP	REMOTE SUMP			DIMENSIONS			Refrig. Charge NH ₃ lbs. ⁵	WEIGHTS		
						Water In ³	Sump Drain ³	Gal. Req'd ⁴	Height H	Length L	Ctrs C		Unit Shipping ⁶	Unit Operating ⁷	Heaviest Section
XL 355	251.1	63600	10	600	5	6‡	10†	350	166.25	145	30.25	400	15300	23179	10500
XL 390	276.5	73100	15	600	5	6‡	10†	350	166.25	145	30.25	400	15350	23229	10500
XL 395	280.1	63100	10	600	5	6‡	10†	350	173.5	145	37.5	500	17670	25650	12870
XL 415	294.3	79700	20	600	5	6‡	10†	350	166.25	145	30.25	400	15400	23279	10500
XL 425	301.4	62500	10	600	5	6‡	10†	350	180.25	145	44.25	600	19890	27972	15090
XL 435	308.5	72200	15	600	5	6‡	10†	350	173.5	145	37.5	500	17720	25700	12870
XL 440	312	86300	25	600	5	6‡	10†	350	166.25	145	30.25	400	15500	23379	10500
XL 470	333.3	78900	20	600	5	6‡	10†	350	173.5	145	37.5	500	17770	25750	12870
XL 475	336.8	71300	15	600	5	6‡	10†	350	180.25	145	44.25	600	19940	28022	15090
XL 495	351	85500	25	600	5	6‡	10†	350	173.5	145	37.5	500	17870	25850	12870
XL 505	358.1	78200	20	600	5	6‡	10†	350	180.25	145	44.25	600	19990	28072	15090
XL 530	375.8	84700	25	600	5	6‡	10†	350	180.25	145	44.25	600	20090	28172	15090
XL 535	379.4	96200	10 & 5	900	7.5	6‡	10†	520	166.25	211	30.25	590	21390	33094	14740
XL 590	418.4	111000	15 & 7.5	900	7.5	6‡	10†	520	166.25	211	30.25	590	21490	33194	14740
XL 600	425.5	95850	10 & 5	900	7.5	6‡	10†	520	173.5	211	37.5	740	24930	36779	18280
XL 630	446.7	123000	20 & 10	900	7.5	6‡	10†	520	166.25	211	30.25	590	21540	33244	14740
XL 640	453.8	95800	10 & 5	900	7.5	6‡	10†	520	180.25	211	44.25	890	27940	39934	21590
XL 660	468	132000	25 & 15	900	7.5	6‡	10†	520	166.25	211	30.25	590	21690	33394	14740
XL 665	471.6	110600	15 & 7.5	900	7.5	6‡	10†	520	173.5	211	37.5	740	25030	36879	18280
XL 710	503.5	121450	20 & 10	900	7.5	6‡	10†	520	173.5	211	37.5	740	25080	36929	18280
XL 715	507	110500	15 & 7.5	900	7.5	6‡	10†	520	180.25	211	44.25	890	28340	40334	21590
XL 745	528.3	130400	25 & 15	900	7.5	6‡	10†	520	173.5	211	37.5	740	25230	37079	18280
XL 765	542.5	121100	20 & 10	900	7.5	6‡	10†	520	180.25	211	44.25	890	28390	40384	21590
XL 785	556.7	132100	20 & 10	1050	7.5	6‡	12†	683	184	245	48.25	890	29260	43155	21360
XL 805	570.9	130000	25 & 15	900	7.5	6‡	10†	520	180.25	211	44.25	890	28540	40534	21590
XL 830	585.6	142000	25 & 15	1050	7.5	6‡	12†	683	184	245	48.25	890	29430	43155	21360
XL 830-2	588.6	159400	(2) 20	1200	(2) 5	(2)‡	(2)10‡	700	166.25	211	30.25	800	30800	46558	(2)10500

‡Flanged †Plain End

*Do not use for construction—product drawings available on request.
Footnotes are listed on page 13.*

XL

PERFORMANCE

TABLES

XLP Model	Heat Rejection (MBH)
S 90	1,323.0
S 100	1,470.0
S 110	1,617.0
S 115	1,690.5
S 120	1,764.0
S 125	1,837.5
S 130	1,911.0
S 135	1,984.5
S 140	2,058.0
S 145	2,131.5
S 150	2,205.0
S 155	2,278.5
M 155	2,278.5
S 160	2,352.0
S 165	2,425.5
S 170	2,499.0
M 170	2,499.0
S 175	2,572.5
S 180	2,646.0
S 185	2,719.5
M 185	2,719.5
S 190	2,793.0
M 190	2,793.0
S 195	2,866.5
M 195	2,866.5
S 200	2,940.0
M 200	2,940.0
S 205	3,013.5
M 205	3,013.5
S 210	3,087.0
M 210	3,087.0
S 220	3,234.0
M 220	3,234.0
M 225	3,307.5
S 230	3,381.0
M 235	3,454.5
ML 235	3,454.5
S 240	3,528.0
M 240	3,528.0
M 245	3,601.5
S 250	3,675.0
M 260	3,822.0
ML 260	3,822.0
ML 265	3,895.5
S 270	3,969.0
M 270	3,969.0
ML 270	3,969.0
M 280	4,116.0
ML 280	4,116.0
M 285	4,189.5
ML 290	4,263.0

XLP Model	Heat Rejection (MBH)
L 290	4,263.0
ML 295	4,336.5
ML 300	4,410.0
L 300	4,410.0
M 305	4,483.5
ML 305	4,483.5
M 310	4,557.0
L 315	4,630.5
M 320	4,704.0
ML 320	4,704.0
ML 330	4,851.0
L 330	4,851.0
M 335	4,924.5
L 335	4,924.5
M 340	4,998.0
ML 345	5,071.5
L 345	5,071.5
ML 350	5,145.0
L 350	5,145.0
M 355	5,218.5
L 355	5,218.5
XL 355	5,218.5
M 360	5,292.0
M 370	5,439.0
L 375	5,512.5
ML 380	5,586.0
ML 385	5,659.5
L 390	5,733.0
XL 390	5,733.0
M 395	5,806.5
ML 395	5,806.5
XL 395	5,806.5
M 405	5,953.5
L 405	5,953.5
ML 410	6,027.0
L 415	6,100.5
XL 415	6,100.5
ML 425	6,247.5
XL 425	6,247.5
M 430	6,321.0
ML 430	6,321.0
L 435	6,394.5
XL 435	6,394.5
XL 440	6,468.0
ML 445	6,541.5
ML 450	6,615.0
L 460	6,762.0
XL 470	6,909.0
ML 475	6,982.5
L 475	6,982.5
XL 475	6,982.5

XLP Model	Heat Rejection (MBH)
ML 490	7,203.0
XL 495	7,276.5
L 505	7,423.5
XL 505	7,423.5
L 510	7,497.0
ML 520	7,644.0
L 520	7,644.0
XL 530	7,791.0
XL 535	7,864.5
L 565	8,305.5
L 575	8,452.5
L 590	8,673.0
XL 590	8,673.0
XL 600	8,820.0
XL 630	9,261.0
L 635	9,334.5
XL 640	9,408.0
XL 660	9,702.0
XL 665	9,775.5
XL 710	10,437.0
XL 715	10,510.5
XL 745	10,951.5
XL 765	11,245.5
XL 785	11,539.5
XI 805	11,833.5
M 810-2	11,907.0
L 810-2	11,907.0
ML 820-2	12,054.0
XL 830	12,201.0
L 830-2	12,201.0
XL 830-2	12,201.0
XL 845	12,421.5
ML 850-2	12,495.0
XI 850-2	12,495.0
M 860-2	12,642.0
ML 860-2	12,642.0
XL 870	12,789.0
L 870-2	12,789.0
XL 870-2	12,789.0
XL 880-2	12,936.0
ML 890-2	13,083.0
XL 895	13,156.6
ML 900-2	13,230.0
L 920-2	13,524.0
XL 940	13,818.0
XL 940-2	13,818.0
ML 950-2	13,965.0
L 950-2	13,965.0
XL 950-2	13,965.0
ML 980-2	14,406.0
XL 990-2	14,553.0

XLP Model	Heat Rejection (MBH)
L 1010-2	14,847.0
XL 1010-2	14,847.0
L 1020-2	14,994.0
ML 1040-2	15,288.0
L 1040-2	15,288.0
XL 1060-2	15,582.0
XL 1070-2	15,729.0
L 1130-2	16,611.0
L 1150-2	16,905.0
L 1180-2	17,346.0
XL 1180-2	17,346.0
XL 1200-2	17,640.0
XL 1260-2	18,522.0
L 1270-2	18,669.0
XL 1280-2	18,816.0
XL 1320-2	19,404.0
XL 1330-2	19,551.0
XL 1420-2	20,874.0
XL 1430-2	21,021.0
XL 1490-2	21,903.0
XL 1530-2	22,491.0
XL 1570-2	23,079.0
XL 1610-2	23,667.0
XL 1660-2	24,402.0
XL 1690-2	24,843.0
XL 1740-2	25,578.0
XL 1790-2	26,313.0
XL 1880-2	27,636.0

XLC Model	Heat Rejection (MBH)
25	367.5
28	411.6
30	441.0
35	514.5
38	558.6
40	588.0
43	632.1
50	735.0
55	808.5
58	852.6
60	882.0
68	999.6
75	1,102.5
78	1,146.6
80	1,176.0
85	1,249.5
90	1,323.0
95	1,396.5
100	1,470.0
108	1,587.6
110	1,617.0
115	1,690.5
120	1,764.0
128	1,881.6
130	1,911.0
140	2,058.0
145	2,131.5
150	2,205.0
155	2,278.5
160	2,352.0
165	2,425.5
170	2,499.0
185	2,719.5
195	2,866.5
205	3,013.5
220	3,234.0
230	3,381.0
235	3,454.5
250	3,675.0
285	4,189.5
300	4,410.0
310	4,557.0
340	4,998.0
350	5,145.0
365	5,365.5
385	5,659.5
410-2	6,027.0
440-2	6,468.0
460-2	6,762.0
470-2	6,909.0
500-2	7,350.0
570-2	8,379.0
600-2	8,820.0
620-2	9,114.0
680-2	9,996.0
700-2	10,290.0
730-2	10,731.0
770-2	11,319.0

